

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/017540 A1

- (51) International Patent Classification⁷: **H04B 7/24**
- (21) International Application Number:
PCT/KR2003/001632
- (22) International Filing Date: 13 August 2003 (13.08.2003)
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:
10-2002-0048263 14 August 2002 (14.08.2002) KR
- (71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul 150-010 (KR).
- (72) Inventors: **LEE, Young-Dae**; Sinan Apt. 419-1501, Changwoo-Dong, Hanam, Gyeonggi-Do 465-711 (KR). **YI, Seung-June**; Daechong Apt. 303-403, Gaepo-Dong, Gangnam-Gu, Seoul 135-240 (KR). **LEE, So-Young**; Toigye 2Cha Apt. 366-702, Ogeum-Dong, Gunpo, Gyeonggi-Do 435-758 (KR).
- (74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR SCHEDULING TRANSMISSION OF MBMS DATA IN UMTS

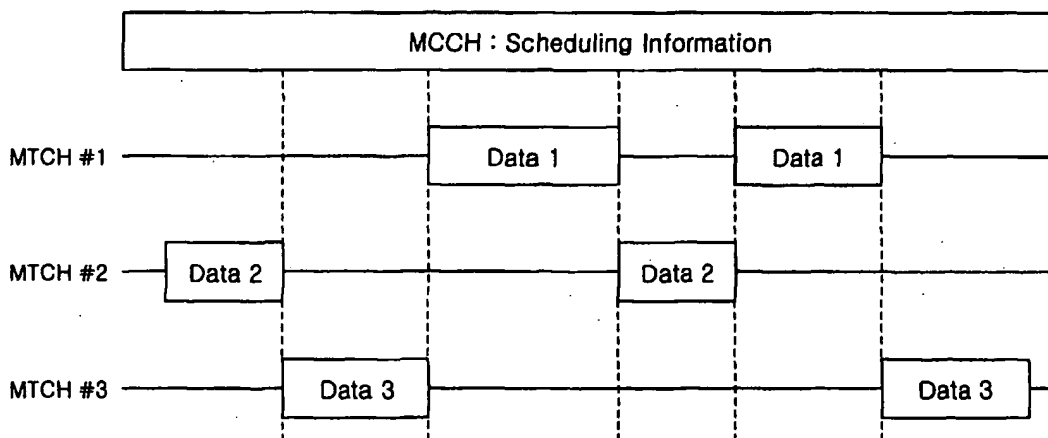

(57) Abstract: A multimedia service of a UMTS (Universal Mobile Telecommunications System) is disclosed. When UTRAN provides an MBMS service, it designates time at which each data for MBMS service is transmitted and transmits the corresponding time information to a terminal group which desires to receive a specific MBMS service. Accordingly, a terminal of the terminal group receives the MBMS service data during a section of the corresponding time information and also receives a control signal or other service than the MBMS service at other time.

WO 2004/017540 A1

METHOD FOR SCHEDULING TRANSMISSION OF MBMS DATA IN UMTS

TECHNICAL FIELD

5 The present invention relates to a multimedia broadcast/multicast service (MBMS) of a UMTS (Universal Mobile Telecommunications System) and, more particularly, to a method for scheduling transmission of MBMS data.

BACKGROUND ART

10 A universal mobile telecommunications system (UMTS) is a third generation mobile communication system that has evolved from a standard known as Global System for Mobile communications (GSM). This standard is a European standard which aims to provide an improved mobile
15 communication service based on a GSM core network and wideband code division multiple access (W-CDMA) technology.

 Figure 1 shows a network structure of a general UMTS.

 As shown in Figure 1, the UMTS is roughly divided into a terminal, a UTRAN and a core network.

20 The UTRAN includes one or more radio network sub-systems (RNS). Each RNS includes an RNC and one or more Node Bs managed by the RNCs.

 Node Bs managed by the RNCs, receive information sent by the

physical layer of a terminal (e.g., mobile station, user equipment and/or subscriber unit) through an uplink, and transmit data to a terminal through a downlink. Node Bs, thus, operate as access points of the UTRAN for terminal.

The RNCs perform functions which include assigning and managing
5 radio resources, and operate as an access point with respect to the core network.

A primary function of UTRAN is constructing and maintaining a radio access bearer (RAB) for a call connection between the terminal and the core network. The core network applies quality of service (QoS) requirements of
10 end-to-end to the RAB, and accordingly, UTRAN can satisfy the QoS requirements of the end-to-end by constructing and maintaining the RAB.

The RAB service is divided into an lu bearer service and a radio bearer service of a lower concept. The lu bearer service handles reliable user data transmission between boundary nodes of UTRAN and the core network,
15 while the radio bearer service handles reliable user data transmission between the terminal and UTRAN.

In the UMTS, traffic is classified as four QoS classes according to its characteristics as follows: conversational class, streaming class, interactive class and background class. The conversational class is a type of symmetric
20 traffic requiring minimum fixed delay, allowing no buffering and offering guaranteed bit rate. The streaming class is a type of an asymmetric traffic requiring minimum variable delay, allowing buffering and offering guaranteed bit rate. The interactive class is a type of an asymmetric traffic requiring

moderate variable delay, allowing buffering and offering no guaranteed bit rate. The background class is a type of an asymmetric traffic requiring big variable delay, allowing buffering and offering no guaranteed bit rate

Figure 2 illustrates a radio protocol between the terminal and UTRAN
5 on the basis of the 3GPP wireless access network standards.

With reference to Figure 2, the radio protocol is vertically formed of a physical layer, a data link layer and a network layer, and is horizontally divided into a user plane for transmitting data information and a control plane for transmitting a control signal.

10 The user plane is a region to which traffic information of a user such as voice or an IP packet is transmitted. The control plane is a region to which control information such as an interface of a network or maintenance and management of a call is transmitted.

In Figure 2, protocol layers can be divided into a first layer (L1), a
15 second layer (L2) and a third layer (L3) based on three lower layers of an open system interconnection (OSI) standard model well known in a communication system.

The first layer (PHY) provides an information transfer service to the upper layer by using various radio transfer techniques.

20 The first layer is connected to the MAC layer through a transport channel, and data is transferred between the MAC layer and the PHY layer through the transport channel.

The MAC layer provides a re-allocation service of the MAC

parameter for allocation and re-allocation of radio resources.

The MAC layer is connected to the radio link control (RLC) layer through a logical channel, and various logical channels are provided according to the kind of transmitted information. In general, when information of the control plane is transmitted, a control channel is used. When
5 information of the user plane is transmitted, a traffic channel is used.

The MAC is classified into an MAC-b sublayer, an MAC-d sublayer and an MAC-c/sh sublayer according to types of managed transport channels. The MAC-b sublayer manages a BCH (Broadcast Channel) handling
10 broadcast of system information, while the MAC-c/sh sublayer manages common transport channel such as FACH (Forward Access Channel), DSCH (Downlink Shared Channel), or the like, common to other terminals.

In UTRAN, the MAC-c/sh sublayer is positioned at a controlling RNC (CRNC) and manages channels shared by every terminal in a cell, so that
15 one MAC-c/sh sublayer exists in each cell.

The MAC-d sublayer manages a DCH (Dedicated Channel), a dedicated transport channel for a specific terminal. Accordingly, the MAC-d sublayer is positioned at a serving RNC (SRNC) managing a corresponding terminal, and one MAC-d sublayer exists also at each terminal.

20 A radio link control (RLC) layer supports a reliable data transmission and may perform a function of segmentation and concatenation of an RLC service data unit (SDU) coming from a upper layer. The RLC SDU transferred from the upper layer is adjusted in its size according to a throughput capacity

at the RLC layer, to which header information is added, and then transferred in a form of a PDU (Protocol Data Unit) to the MAC layer. The RLC layer includes an RLC buffer for storing the RLC SDU or the RLC PDU coming from the upper layer.

5 A broadcast/multicast control (BMC) layer performs functions of scheduling a cell broadcast message (CB) transferred from the core network and broadcasting the CB to UEs positioned in a specific cell(s). At the side of UTRAN, the CB message transferred from the upper layer is combined with information, such as a message ID, a serial number or a coding scheme, and
10 transferred in a form of BMC message to the RLC layer and to the MAC layer through a CTCH (Common Traffic Channel), a logical channel. In this case, the logical channel CTCH is mapped to a FACH (Forward Access Channel), a transport channel, and an S-CCPCH (Secondary Common Control Physical Channel), a physical channel.

15 A packet data convergence protocol (PDCP) layer is an upper layer of the RLC layer, allowing data to be transmitted effectively on a radio interface with a relatively small bandwidth through a network protocol such as the IPv4 or the IPv6. For this purpose, the PDCP layer performs a function of reducing unnecessary control information, which is called a header
20 compression, and in this respect, RFC2507 and RFC3095 (robust header compression: ROHC), a header compression technique defined by an Internet standardization group called an IETF (Internet Engineering Task Force), can be used. In these methods, because the only information

requisite for the header part of a data is transmitted, control information is transmitted, so that an amount of data transmission can be reduced.

The RRC layer positioned in the lowest portion of the third layer (L3) is defined only in the control plane and controls the logical channels, the transport channels, and the physical channels in relation to the setup, the reconfiguration, and the release of the RBs. The RB signifies a service provided by the second layer for data transmission between the terminal and UTRAN, and setting up the RB means processes of stipulating the characteristics of a protocol layer and a channel, which are required for providing a specific service, and setting the respective detailed parameters and operation methods.

A cell broadcast service (CBS) related to the BMC layer will now be described.

A service that a message including a character or a numeric is given and taken between terminals or between a terminal and a network is called a short message service (SMS). The SMS is classified into a cell broadcast SMS (SMS-CB) for transmitting the same message to one or more cells and a point-to-point SMS (SMS-PP).

The CBS service, which broadcasts plural CBS messages to every user of a specific area, corresponds to the SMS-CB.

CBS messages are broadcast to a geographical area called a broadcast area. This area includes one or more cells or is wholly constructed as a public land mobile network (PLMN). Each CBS message is broadcast to

the geographical area according to a mutual contract between an information provider and a PLMN operator.

The BMC messages used at the BMC protocol includes a CBS message for transmitting user information, a scheduling message for allowing
5 a terminal to easily receive a CBC message, and a CBS41 message for transmitting a short message service (SMS) message transmitted from an ANSI41 network. Every message is transmitted from UTRAN only to the terminal. The terminal performs a discontinuous reception (DRX) function by using information of the scheduling message transferred from UTRAN,
10 thereby reducing a battery consumption.

The scheduling of a BMC message is divided into a first level scheduling and a second level scheduling. The first level scheduling determines (allocates) a frame for transmitting a data of a common traffic channel (CTCH).

15 Figure 3 illustrates a first level scheduling method. The numbers of the first line indicates a system frame number (SFN) value.

The logical channel CTCH is mapped to the physical channel (S-CCPCH) through the transport channel (FACH). The first level scheduling previously designates a frame of the physical channel by which data of the
20 logical channel (CTCH). Data transmitted to the CTCH is transmitted by a certain consecutive M number of frames, and the frame group is repeated by certain period (N) of frames.

For example, as shown in Figure 3, data transmitted by the CTCH is

always transmitted for two consecutive frame intervals and repeated by the period of six frames. A frame group transmitting the CTCH data starts when the SFN value is 'K' and is repeated by the period (N). In Figure 3, the frame group starts when the SFN value is '2' and then repeatedly transmitted by the period of '6'.

The first level scheduling is performed in the same manner on every service of the CBS. That is, as for every service of the CBS, the same cell is allocated with the same frame. The first level scheduling is performed at the RRC layer and the values N, K and M are included in the system information and broadcast to the terminal.

The second level scheduling divides the frame allocated in the first level scheduling into a CBS schedule period. The second level scheduling is performed at the BMC layer, and the terminal obtains CBS schedule period information by receiving a BMC scheduling message. The BMC scheduling message includes information on a length of the CBS schedule period and a start point of the CBS schedule period.

The length of the CBS schedule indicates a length between a start and an end of the CBS schedule period starting after the BMC scheduling message. The start point of the CBS schedule period indicates a different value between a transmission time point of a current BMC scheduling message and a start point of a CBS schedule period starting after the BMC scheduling message.

Thus, as the terminal receiving the CBS message receives the BMC

scheduling message, it can recognize when the next CBS schedule period starts and ends. The terminal can obtain the next CBS schedule period information by receiving the BMC scheduling message during the CBS schedule period. In this manner, the terminal can recognize when the BMC
5 message is not transmitted, so that it can perform the discontinuous reception (DRX).

Figure 4 shows a construction of the BMC scheduling message.

As shown in Figure 4, the BMC scheduling message provides information on one or plural BMC messages transmitted during the next CBS
10 schedule period. A new message bit map parameter indicates each message transmitted during the next CBS schedule period is a new message or a previously broadcast message. A message explanation parameter indicates a type or an ID of each BMC message transmitted during the next CBS schedule period. At this time, the message refers to one of a CBS message,
15 a scheduling message and a CBS41 message.

The maximum length of the CBS message is generally limited to 1230 octet, so that the CBS message is not suitable for broadcasting or multicasting multimedia data. In addition, because the CBS message is broadcast to every terminal existing in a specific cell, a multicast for providing
20 a service to a specific terminal group is not available wirelessly.

Therefore, in order to broadcast or multicast the multimedia data to a specific terminal group wirelessly, a new service called a multimedia broadcast/multicast service (MBMS) has been proposed.

The MBMS will now be described.

The MBMS is a service for transmitting multimedia data such as audio, video or image data to plural terminals by using a uni-directional point-to-multipoint bearer service. The MBMS is divided into a broadcast mode and a multicast mode. That is, the MBMS is divided into an MBMS broadcast service and an MBMS multicast service.

The MBMS broadcast mode is a service for transmitting multimedia data to every user in a broadcast area. The broadcast area means a broadcast service available area. One or more broadcast areas may exist in one PLMN, one or more broadcast services can be provided in one broadcast area, and one broadcast service can be provided to several broadcast areas.

The MBMS multicast mode is a service for transmitting multimedia data only to a specific user group existing in a multicast area. The multicast area means a multicast service available area. One or more multicast areas can exist in one PLMN, one or more multicast services can be provided in one multicast area, and one multicast service can be provided to several multicast areas.

In the multicast mode, a user is requested to join a multicast group to receive a specific multicast service. At this time, the multicast group refers to a user group that receives the specific multicast service, and joining refers to a behavior of being admitted to the multicast group intending for receiving the specific multicast service.

Two types of logical channels are provided for MBMS data transmission: MBMS Control Channel (MCCH) and MBMS Traffic Channel (MTCH). The MCCH channel is used to transmit MBMS control information to MBMS terminals. The MTCH is used to transmit data of a specific MBMS service to MBMS terminals. Therefore, if multiple MBMS services are available in a cell, multiple MTCH should be configured in the cell. In case of the multicast mode, the MTCH is configured only at the MBMS terminals that have joined the specific MBMS service.

The MAC layer adds an MAC header to the received MBMS data and transfers it to the physical layer of the base station through the common transport channel. And then, the MBMS data undergoes coding and modulation in the physical layer and transmitted to the terminal through the common physical channel. At this time, the common transport channel transfers the data by a certain time unit of Transmission Time Interval (TTI), and the common physical channels mapped to the common transport channel are transmitted by the frame unit.

In order to simultaneously receive several services transferred through plural channels, the most simple method is to receive several channels simultaneously, which, however, makes the terminal complicate.

Thus, in order to solve the problem, in the conventional CBS service, a scheduling method is adopted in which a time during which a specific service is provided is predetermined and informed. This method is useful in case of simultaneously receiving the MBMS and a different service or the

MBMS and control information. In addition, while the MBMS is not being received, the terminal may perform a discontinuous reception (DRX) to prevent battery consumption.

However, in the case of the conventional CBS service, only one
5 service is provided in one cell so the same scheduling parameter is set in the cell. Meanwhile, in the case of the MBMS, various services are to be provided in one cell, so a different scheduling method from the scheduling of the CBS is required.

The above references are incorporated by reference herein where
10 appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

DISCLOSURE OF THE INVENTION

15 Therefore, an object of the present invention is to provide a transmission scheduling method suitable for a wireless access network broadcasting and multicasting high speed data with various characteristics.

Another object of the present invention is to provide a multimedia service providing method in which data transmission time is set different for
20 MBMS services so that a different service or a different channel can be received at time when a specific MBMS service data is not transmitted.

To achieve at least the above objects in whole or in parts, there is provided a multimedia service data scheduling method of a wireless

communication system providing a multimedia broadcast/multicast service (MBMS) to a terminal group consisting of plural terminals, including: designating a radio resource of a wireless channel for transferring specific MBMS data; and transferring the designated radio resource information to a
5 terminal group for every MBMS.

The multimedia service data scheduling method additionally includes a step in which each terminal of a terminal group receives multimedia service data on the basis of the transmitted radio resource information.

Preferably, the radio channel is a common physical channel.

10 Preferably, the radio resource is scheduling information indicating a time at which MBMS data is to be transmitted.

Preferably, different radio resources are allocated for different MBMS data.

15 Preferably, the radio resource is designated when UTRAN sets or resets a radio bearer (RB) for a specific MBMS.

Preferably, the radio resource is periodically or non-periodically allocated when an RB for a specific MBMS is set.

Preferably, the terminal receives MBMS data during a time indicated by frame allocation information.

20 Preferably, the terminal receives a control signal during a time other than the time indicated by the frame allocation information.

Preferably, the terminal stops receiving every service data during a time other than the time indicated by the frame allocation information.

Preferably, the terminal receives other service data than MBMS service during a time other than the time indicated by scheduling information.

Preferably, the radio resource is designated by a radio resource control (RRC) layer or by a multimedia layer.

5 Preferably, when the radio resource is designated by the radio resource control (RRC) layer, the radio resource is transmitted in a frame form.

Preferably, the radio resource is transferred to the terminal group through a broadcast channel or a control channel.

10 Preferably, if the radio resource is designated by the multimedia layer, the radio resource is added in an MBMS scheduling message to be transmitted.

Preferably, different MBMS scheduling messages are transferred to the terminal group through different channels.

15 Preferably, the channel is a common traffic channel.

Preferably, the MBMS scheduling message includes a sequence number or an identifier and scheduling information of specific MBMS data to be broadcast or multicast next.

Preferably, the MBMS scheduling message can be transferred
20 periodically several times while the specific MBMS is provided.

Preferably, the MBMS scheduling message indicates whether corresponding MBMS data is first transmitted or has been repeatedly transmitted.

Preferably, the MBMS scheduling message is transferred several times non-periodically while the specific MBMS is provided.

Preferably, the MBMS scheduling message indicates a length of an MBMS schedule term and a length between a start point and an end point of the MBMS schedule term.

To achieve at least these advantages in whole or in parts, there is further provided a multimedia service providing method of a wireless communication system providing a multimedia service to a terminal group consisting of plural terminals, including: allocating a frame for a specific multimedia service; transferring frame allocation information to a specific terminal group; and receiving multimedia service data by each terminal group on the basis of the frame allocation information.

Preferably, the multimedia service is a multimedia broadcast/multicast service (MBMS).

Preferably, the frame is a frame of a common physical channel through which specific multimedia service data is to be transmitted.

Preferably, different multimedia service data are allocated to different frames.

Preferably, the frame is allocated when a radio bearer (RB) for a specific MBMS is set or reset.

Preferably, the frame is periodically or non-periodically allocated when an RB has been set for a specific MBMS.

Preferably, the frame is allocated by a radio resource control (RRC)

layer.

Preferably, the frame indicates a time at which a specific MBMS data is to be transmitted.

Preferably, the frame allocation information indicates a time interval
5 for which a specific MBMS data is transmitted and a period that the time interval is repeated.

Preferably, the terminal group receives MBMS data during the time indicated by the frame allocation information.

Preferably, the terminal group receives a control signal at a certain
10 time other than the time indicated by the frame allocation information.

Preferably, the terminal group stops receiving every service data for a certain time other than the time indicated by the frame allocation information.

Preferably, the frame allocation information is transferred through a
15 broadcast channel and a control channel.

To achieve at least these advantages in whole or in parts, there is further provided a multimedia service providing method of a wireless communication system providing a multimedia service to a terminal group consisting of plural terminals, including: independently performing a data
20 transmission scheduling for each multimedia service; transferring the scheduling information to a specific terminal group; and receiving multimedia service data by each terminal of the terminal group on the basis of the scheduling information.

Preferably, the multimedia service is a multimedia broadcast/multicast service (MBMS).

Preferably, the scheduling is performed when UTRAN sets or resets a radio bearer (RB) for a specific multimedia service.

5 Preferably, the data transmission scheduling is independently performed, and the scheduling information is transferred for every multimedia service.

Preferably, the scheduling information is transferred several times periodically or non-periodically while a radio bearer (RB) for a specific
10 multimedia service is set.

Preferably, the scheduling information is transferred through different common traffic channels.

Preferably, the scheduling information is time information at which a specific data is to be transmitted.

15 Preferably, the scheduling information is transmitted by being added in an MBMS scheduling message.

Preferably, different MBMS services use different MBMS scheduling messages.

Preferably, different MBMS scheduling messages are transferred to
20 the terminal group through different channels.

Preferably, the MBMS scheduling message includes a sequence number or an identifier and scheduling information of a specific MBMS data to be broadcast or multicast next.

Preferably, the MBMS scheduling message includes information indicating whether the corresponding MBMS data is first transferred or has been repeatedly transmitted.

Preferably, the MBMS scheduling message can be transferred
5 several times periodically while a specific MBMS is provided.

Preferably, the MBMS scheduling message can be transferred several times non-periodically while a specific MBMS is provided.

Preferably, the MBMS scheduling message indicates a length of an MBMS schedule term and a length between a start point and an end point of
10 the MBMS schedule term.

Preferably, the scheduling information is generated by a broadcast and multicast control layer of UTRAN.

Preferably, the broadcast and multicast control layer transfers scheduling information to a lower layer.

15 Preferably, the scheduling information is transferred to a broadcast and multicast control layer of a specific terminal group.

Preferably, the broadcast and multicast control layer of the terminal transfers the received scheduling information to a lower layer.

Preferably, the terminal group receives multimedia service data
20 during a time period indicated by the scheduling information.

Preferably, the terminal group receives a control signal during other time than a time indicated by the scheduling information.

Preferably, the terminal group receives data of other service than the

MBMS during a time other than the time indicated by the scheduling information.

Preferably, the terminal group stops receiving of data of services for a time other than the time indicated by the scheduling information.

5 Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and advantages of the invention may be realized and attained as particularly
10 pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the
15 following drawings in which like reference numerals refer to like elements wherein:

Figure 1 illustrates a network structure of general UMTS system.

Figure 2 illustrates a structure of a radio access interface protocol between a terminal and UTRAN on the basis of 3GPP radio access network
20 standards;

Figure 3 illustrates a first level scheduling method;

Figure 4 shows a construction of the BMC scheduling message;

Figure 5 shows an MBMS service transmitting scheme in accordance

with the present invention;

Figure 6 shows an example of MBMS scheduling message;

Figure 7 illustrates a time information setting method for transmitting MBMS data through a control layer;

5 Figure 8 illustrates a process that while a terminal of a terminal group which receives specific MBMS data is receiving MBMS data, it receives a control signal;

Figure 9 illustrates a time information setting method for transmitting MBMS data through a user layer; and

10 Figure 10 illustrates a process that while a terminal of a terminal group which receives specific MBMS data is receiving MBMS data, it receives a different service;

MODES FOR CARRYING OUT THE PREFERRED EMBODIMENTS

15

The present invention is implemented in a mobile communication system such as UMTS (Universal Mobile Telecommunications System) developed by 3GPP. Without being restricted thereto, the present invention can be also applied to a communication system operated in different
20 standards.

The present invention proposes a method, in a wireless communication system providing multimedia services to a specific terminal group through a common wireless channel, that a radio resource of a

common wireless channel for transmitting specific multimedia service data is designated and each specific multimedia service is transmitted to a terminal group.

In the present invention, different MBMS services provided at one cell have different scheduling parameters. The scheduling indicates whether
5 corresponding MBMS service data (referred to as 'MBMS data', hereinafter) is transmitted or not, and the scheduling parameter includes time information indicates time at which a corresponding data is transmitted. Accordingly, different MBMS services can transmit data in different time without
10 overlapping. That is, only one MBMS service is provided at one time section.

In the present invention, a wireless network designates a certain time at which MBMS service data is to be transmitted for each MBMS service and transfers corresponding time information to the terminal group which desired to receive a specific MBMS service.

15 Therefore, terminals belong to the terminal group may receive other service or other channel while the specific MBMS data is not transmitted. If there is no other MBMS service or other channel while the MBMS data is not transmitted, the terminals belonging to the corresponding terminal group turn to an idle state to prevent a battery consumption.

20 In the present invention, if the QoS type of MBMS services is categorized as the background class, UTRAN can transmit more than one MBMS services through a specific physical channel or a specific transport channel. Accordingly, UTRAN should determine whether it schedules

transmission of MBMS services on a physical/transport channel or not, based on a QoS type of the MBMS services before setting up the MBMS services in a cell. If the QoS type of the MBMS services is all the background class, UTRAN transmits different MBMS services at different transmission intervals.

5 The MBMS data transmitting and receiving method of the present invention is divided into a method that a transmission interval is designated at a control plane and a method that the transmission interval is designated at the user plane. The two methods can be independently applied or applied together like the level 1 and level 2 scheduling of CBS. In the case that the
10 two methods are applied together, the method in which the transmission interval is designated at the control plane corresponds to the level 1 scheduling of CBS, while the method in which the transmission interval is designated at the user plane corresponds to the level 2 scheduling of CBS.

 In the case that the control plane designates the transmission interval,
15 the third layer protocol such as RRC controls transmission/reception of MBMS data or allocation of a transmission interval. Meanwhile, in the case that the user plane designates the transmission interval, the second layer protocols such as PDCP, RLC and MAC controls transmission/reception of MBMS data or allocation of a transmission interval.

20 In general, the MBMS service is divided into a streaming type service and a background type service. the present invention proposes a method that, in a cell providing plural background type MBMS services, a specific downlink MBMS channel dividedly provides plural background type MBMS services at

each different time.

That is, in the present invention, UTRAN discriminates the streaming type MBMS service and the background type MBMS service, collects the background type MBMS services, time-multiplexes them at a specific MBMS
5 channel, and downwardly transmits them. At this time, the plural time-multiplexed services do not overlap each other at the same time. The specific download MBMS channel refers to a transport channel or a physical channel.

As for the plural services that are time-multiplexed and transmitted, UTRAN control transmission and reception of each service. That is, UTRAN
10 transfers time information indicating when data of each service is transmitted or not to the terminals.

In the present invention, if the QoS type of MBMS services is categorized as the background class, UTRAN can transmit more than one MBMS services through a specific physical channel or a specific transport
15 channel. Accordingly, UTRAN should determine whether it schedules transmission of MBMS services on a physical/transport channel or not, based on a QoS type of the MBMS services before setting up the MBMS services in a cell. If the QoS type of the MBMS services is all the background class, UTRAN transmits different MBMS services at different transmission intervals.

20 Figure 5 shows an MBMS service transmission method in accordance with the present invention. Plural background type services (MBMS service 1 and MBMS service 2) are transmitted on one channel by the time-multiplexing method. In this respect, one channel refers to a

transport channel or a physical channel.

Designating of the transmission interval of the MBMS data through the control plane

5 The radio resource control (RRC) layer of UTRAN first determines a certain time at which specific MBMS data is to be transmitted. That is, UTRAN RRC determines a frame of a common physical channel for transmitting the specific MBMS data. For example, the UTRAN RRC determines a time section at which the specific multimedia service data are
10 consecutively transmitted and a time interval repetition period. The time interval indicates the number of frames of a consecutive frame group in which the specific multimedia service data is transmitted. The time interval repetition period indicates an interval between a start of a certain consecutive frame group and a start of the next consecutive frame group.

15 This method is similar to the first level scheduling of the conventional CBS service. However, the scheduling of the present invention is different from the conventional scheduling in the aspect that different scheduling parameters are set for MBMS services provided in one cell.

Figure 6 shows an example of an MBMS scheduling in accordance
20 with the present invention.

With reference to Figure 6, logical channels for transmitting MBMS data (MTCH#1, MTCH#2 and MTCH#3) provide different MBMS services of the background class. Each logical channel sends user data of each MBMS

service. A logical channel for transmitting MBMS control information (MCCH) provides scheduling information of different MBMS services.

Figure 6 shows how the MTCHs are allocated to radio frames or transmission time intervals. As shown in Figure 6, UTRAN can allocate data1 of MTCH#1, data2 of MTCH#2 and data3 of MTCH#3 to different radio frames or transmission time intervals. UTRAN transmits scheduling information including allocation through the MCCH to terminals. Thus, terminals can acquire information about when data of one or more MBMS services in which they are interested will be transmitted through an MTCH by receiving the scheduling information through the MCCH.

A process that the RRC layer of UTRAN determines a certain time at which the specific MBMS data is to be transmitted and sets an actual data transmission.

Figure 7 illustrates a time information setting method for transmitting MBMS data through a control layer.

As shown in Figure 7, the UTRAN RRC allocates a frame of a physical channel for transmitting the specific MBMS data (step S10). That is, the UTRAN RRC determines a frame for the specific MBMS service, and transfers corresponding frame allocation information to a lower layer (the physical layer).

In addition, the UTRAN RRC transfers the frame allocation information to an RRC of a terminal group which desired to receive the corresponding MBMS service. In this case, the frame allocation information

can be transferred by using the control plane through a broadcast channel (BCCH) or a control channel (CCCH or DCCH).

The terminal RRC of the terminal group transfers the received frame allocation information to physical layers of each terminal (step S12), and then,
5 physical layers of each terminal store the received frame allocation information, whereby setting of transmission time information of the MBMS data through the control layer is completed (step S13).

The time information setting process of Figure 7 is performed when UTRAN sets or resets a radio bearer (RB) for a specific MBMS service.

10 In a different embodiment, the time information setting process can be dynamically performed while data of the specific MBMS service is being transmitted. That is, while the RB for the specific MBMS service is set, the wireless system can perform the time information setting process several times periodically or non-periodically.

15 In the present invention, a terminal, which receives data of the specific MBMS service, can also receive a signal or data of a different MBMS service or a signal or data of a different service besides the MBMS.

Figure 8 illustrates a process that a terminal of the terminal group receives paging information between receiving MBMS data.

20 The process is on the assumption that a frame for a specific MBMS service has been already allocated through the process of Figure 7.

The physical layer of UTRAN receives MBMS data for the specific MBMS service from an upper layer and transfers it (steps S20 and S21). At

this time, UTRAN controls the MBMS data to be transmitted only in the allocated frame.

The physical layer of the terminal belonging to the terminal group receiving the corresponding MBMS service receives the MBMS data in the
5 frame corresponding to the previously stored frame allocation information and transfers it to the high layer of the user plane (step S22).

For other frame which does not correspond to the previously stored frame allocation information, the terminal group can receive other channel than the MTCH channel for the specific MBMS service. UTRAN RRC
10 transfers a paging signal to an RRC of a terminal belonging to the terminal group. At this time, UTRAN transfers the paging signal during a time section available for the terminal to receive, that is, at other time than the time section allocated for the specific MBMS service (step S23). The paging signal is transmitted and received by using the service of the RLC, MAC and the
15 physical layer positioned at a lower side of the RRC.

Thereafter, the steps S24 ~ S28 are repeatedly performed for the time section allocated for the specific MBMS service and the terminal belonging to the terminal group receives the MBMS data.

The terminal may perform the discontinuous reception (DRX0 or
20 receive the control signal such as paging or services other than the MBMS, such as a short message service (SMS) message, at other time section than the time section allocated for the specific MBMS service.

Designating of transmission section of MBMS data through control plane

When MBMS data is to be transmitted through the control plane, the multimedia broadcast and multicast control layer (referred to as 'multimedia layer', hereinafter) of UTRAN determines a certain time at which the specific MBMS data is to be transmitted. That is, the multimedia layer determines a frame of the common physical channel for transmitting the specific MBMS data, and constructs an MBMS scheduling message similar to the conventional BMS scheduling message.

Unlike the conventional art in which only one BMS scheduling message is generated in one cell, in the present invention, the MBMS scheduling message is generated as many as MBMS services in one cell. Namely, different MBMS services provided in one cell use different MBMS scheduling messages.

An MBMS scheduling message for a specific MBMS service is transmitted to the terminal group through a MTCH. Thus, different MBMS scheduling messages for different MBMS services are transmitted to the terminal group through different MTCHs.

One MBMS scheduling message includes a sequence number, an identifier or transmission time information of a specific MBMS data to be broadcast or multicast. A terminal of the terminal group receives the MBMS scheduling message and interprets which data is to be received next and which frame the data is in. Then, on the basis of the interpreted information,

the terminal effectively performs a receiving process therein.

In order to guarantee a reliability of transmission of the MBMS data, UTRAN may repeatedly transmit the same data. In this case, the MBMS scheduling message may inform whether the corresponding MBMS data is first transmitted or has been repeatedly transmitted. While a specific MBMS is provided, the MBMS scheduling message can be transmitted several times periodically or non-periodically. In this case, information of the transmitted MBMS scheduling message may differ at each time.

In one embodiment, the MBMS scheduling message is constructed as follows.

While an RB is set for the specific MBMS service, the MBMS scheduling message is transmitted several times by a certain period. A first transmitted MBMS scheduling message (M1) transfers transmission information of MBMS data until the next MBMS scheduling message (M2) is transmitted. That is, for a specific MBMS service, M1 transfers transmission information of MBMS data between time points when M1 and M2 are transferred.

The terminal group periodically receives the MBMS scheduling message and recognizes whether there is data to be received until the next scheduling message is transmitted. The period of the MBMS scheduling message is determined by the wireless system and transferred to the terminal group when the MBMS RB is set or reset.

In another embodiment, the MBMS scheduling message is

constructed as follows.

While the RB is set for the specific MBMS service, the MBMS scheduling message is transmitted several times non-periodically. Like the BMC scheduling message, the MBMS scheduling message includes a length of the MBMS schedule term and start point information of the MBMS schedule term. The length of the schedule term indicates a length between a start and an end of the MBMS schedule term which starts after the MBMS scheduling message, and the start point of the MBMS schedule term indicates a difference between a transmission time point of the BMC scheduling message and a start time point of the next MBMS schedule term.

Thus, the terminal receiving the MBMS message can recognize the start and the end of the MBMS schedule term to be started later by receiving the MBMS scheduling message. The terminal obtains the next MBMS schedule term information upon receiving the MBMS scheduling message during the MBMS schedule term.

In this manner, the multimedia layer of UTRAN determines a certain time at which data of the specific MBMS service is to be transmitted, and sets transmission an actual data.

Figure 9 illustrates a time information setting method for transmitting MBMS data through a user layer.

As shown in Figure 9, the multimedia layer of UTRAN constructs an MBMS scheduling message including time information on when specific data is to be transmitted for a specific MBMS (step S30), and transfers it to a

multimedia layer of a terminal group which desired to receive the corresponding MBMS (step S31). The MBMS scheduling message is transferred through the lower layer service of the multimedia layer.

The multimedia layer of the terminal interprets the received MBMS scheduling message. The terminal multimedia layer obtains time information (scheduling information) on transmission of specific data to be received from the scheduling message, and transfers the obtained scheduling information to the terminal RRC (step S32). Then, the terminal RRC transfers the scheduling information to the physical layer of the terminal (step S33), and the terminal physical layer stores the scheduling information (step S34). The stored scheduling information is used for reception of specific MBMS data.

The time information setting process of Figure 9 is generated dynamically while the specific MBMS data transmission is performed. That is, while the RB for the specific MBMS service is set, the wireless system performs the time information setting process several times periodically or non-periodically.

In the present invention, a terminal which receives data of a specific MBMS service can also receive a signal or data of a different MBMS service, or a signal or data of other service than the MBMS.

Figure 10 illustrates a process that a terminal of a terminal group which receives specific MBMS data receives a different service between receiving MBMS data. This process is on the assumption that the process of Figure 9 for allocating time information for the specific MBMS has been

already performed.

First, a physical layer of UTRAN receives MBMS data for the specific MBMS from a upper layer (step S40) and then transfers the received MBMS data (step S41). At this time, UTRAN controls the MBMS data of the
5 corresponding service to be transmitted according to a content of the scheduling message.

The physical layer of the terminal belonging to the terminal group receiving the corresponding MBMS service receives the MBMS data in a frame indicated by the stored scheduling information, and transfers it to a
10 upper layer (step S42).

During a frame which does not corresponding to the stored scheduling information, the terminal group may receive other channels than the MTCH channel for the specific MBMS service. For this purpose, UTRAN may transmit a short message service(SMS) message to an RRC of a certain
15 terminal belonging to the terminal group (step S43). Preferably, UTRAN can transmit the SMS message for a time section available for the terminal to receive at other time than the time section allocated for the specific MBMS service.

Thereafter, the steps S44 ~ S46 of Figure 10 are repeatedly
20 performed for the time section allocated for the next specific MBMS service, so that the terminal physical layer receives the MBMS data. The terminal may perform a discontinuous reception (DRX) or receive a control signal such as paging or other services than the MBMS such as the SMS message

service.

As mentioned above, setup of the time information shown in Figure 7 is performed only when the RB is set or reset for the specific MBMS service.

After the RB is set or reset, setup of the time information is performed several
5 times periodically or non-periodically while the MBMS data is transmitted, as shown in Figure 9. The frame allocated in Figure 9 is selectively allocated again among the frames allocated in Figure 7.

Accordingly, the method of Figure 7 is used for a static scheduling,
while the method of Figure 9 is used for a dynamic scheduling. UTRAN and
10 the terminal need to perform the processes of Figures 7 and 9 before data transmission.

After performing the processes of Figures 7 and 9, as shown in
Figures 8 and 10, the corresponding MBMS data is received for the time
section allocated for the specific MBMS service, while the control signal or
15 other data than the specific MBMS service such as the SMS message is received for the non-allocated time section.

As so far described, the conventional CBS scheduling method was
designed for receiving a control signal or performing the DRX while receiving
the CBS service. This method needs to be applied for the MBMS too, but the
20 method of setting the same scheduling parameter in one cell like the conventional method can not be applied as it is to the MBMS service.

In the present invention, the data transmission time is set to be
different for every MBMS service. Accordingly, terminals belonging to a

terminal group can receive other service or other channel at a certain time when data of the specific MBMS service is not transmitted. In addition, at the time section when the data of the MBMS service is transmitted, if there is no other service or channel to be received, terminals belonging to the
5 corresponding terminal group becomes in an idle state, so that a battery consumption of the terminal can be prevented.

The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The
10 description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent
15 structures.

CLAIMS

1. A multimedia service data scheduling method of a wireless communication system providing a multimedia broadcast/multicast service (MBMS) to a terminal group consisting of plural terminals, comprising:

designating a radio resource of a wireless channel for transferring specific MBMS data; and

transferring the designated radio resource information to a terminal group for every MBMS.

10

2. The method of claim 1 further comprising: receiving multimedia service data by each terminal of a terminal group on the basis of the transmitted radio resource information.

3. The method of claim 1, wherein the radio channel is a common physical channel.

15

4. The method of claim 1, wherein the radio resource is time information indicating a time at which MBMS data is to be transmitted.

20

5. The method of claim 1, wherein different radio resources are allocated for each MBMS data, and the radio resource information is frame allocation information.

6. The method of claim 1, wherein the radio resource is designated when UTRAN sets or resets a radio bearer (RB) for a specific MBMS.

5

7. The method of claim 5, wherein the radio resource is periodically or non-periodically allocated when an RB for a specific MBMS is set.

10

8. The method of claim 2, wherein the terminal receives MBMS data for a time indicated by radio resource information.

15

9. The method of claim 2, wherein the terminal receives a control signal or stops receiving of data of every service for a time other than the time indicated by the radio resource information.

20

10. The method of claim 2, wherein the terminal receives other service data than MBMS service during a time other than the time indicated by the radio resource information.

11. The method of claim 1, wherein the radio resource is designated by a radio resource control (RRC) layer or by a multimedia layer.

12. The method of claim 11, wherein when the radio resource is designated by the radio resource control (RRC) layer, the radio resource is transmitted in a frame form.

5 13. The method of claim 12, wherein the radio resource is transferred to the terminal group through a broadcast channel or a control channel.

14. The method of claim 11, wherein if the radio resource is designated by the multimedia layer, the radio resource is added in an MBMS
10 scheduling message to be transmitted.

15. The method of claim 14, wherein different MBMS scheduling messages are transferred to the terminal group through different channels.

15 16. The method of claim 15, wherein the channel is a common traffic channel.

17. The method of claim 13, wherein the MBMS scheduling message includes a sequence number or an identifier and scheduling
20 information of specific MBMS data to be broadcast or multicast next.

18. The method of claim 17, wherein the MBMS scheduling message can be transferred several times periodically while the specific

MBMS is provided.

19. The method of claim 17, wherein the MBMS scheduling message indicates whether corresponding MBMS data is first transmitted or
5 has been repeatedly transmitted.

20. The method of claim 17, wherein the MBMS scheduling message is transferred several times non-periodically while the specific MBMS service is provided.
10

21. The method of claim 2, wherein the MBMS scheduling message indicates a length of an MBMS schedule term and a length between a start point and an end point of the MBMS schedule term.

15 22. A transmission scheduling method in a wireless system for multicasting plural multimedia services, wherein data transmission scheduling is independently performed for each multimedia service.

23. A multimedia service providing method of a wireless
20 communication system providing a multimedia service to a terminal group consisting of plural terminals, comprising:

allocating a frame for a specific multimedia service;

transferring frame allocation information to a specific terminal group;

and

receiving multimedia service data by each terminal group on the basis of the frame allocation information.

5 24. The method of claim 23, wherein the multimedia service is a multimedia broadcast/multicast service (MBMS).

 25. The method of claim 23, wherein the frame is a frame of a common physical channel through which specific multimedia service data is
10 to be transmitted.

 26. The method of claim 25, wherein different multimedia service data are allocated to different frames.

 27. The method of claim 23, wherein the frame is allocated when
15 a radio bearer (RB) for a specific MBMS is set or reset.

 28. The method of claim 23, wherein the frame is periodically or non-periodically allocated when an RB has been set for a specific MBMS.

20 29. The method of claim 23, wherein the frame is allocated by a radio resource control (RRC) layer.

 30. The method of claim 23, wherein the frame indicates a time

at which a specific MBMS data is to be transmitted.

31. The method of claim 23, wherein the frame allocation information indicates a time interval for which a specific MBMS data is transmitted and a period that the time interval is repeated.

32. The method of claim 23, wherein the terminal group receives MBMS data for the time indicated by the frame allocation information.

10 33. The method of claim 23, wherein the terminal group receives a control signal at a certain time other than the time indicated by the frame allocation information.

34. The method of claim 23, wherein the terminal group stops receiving of every service data for a certain time other than the time indicated by the frame allocation information.

35. The method of claim 23, wherein the frame allocation information is transferred through a broadcast channel and a control channel.

20

36. A multimedia service providing method of a wireless communication system providing a multimedia service to a terminal group consisting of plural terminals, comprising:

41

independently performing a data transmission scheduling for each multimedia service;

transferring the scheduling information to a specific terminal group;
and

5 receiving multimedia service data by each terminal of the terminal group on the basis of the scheduling information.

37. The method of claim 36, wherein the multimedia service is a multimedia broadcast/multicast service (MBMS).

10

38. The method of claim 36, wherein the scheduling is performed when UTRAN sets or resets a radio bearer (RB) for a specific multimedia service.

15

39. The method of claim 36, wherein the data transmission scheduling is independently performed, and the scheduling information is transferred for every multimedia service.

40. The method of claim 36, wherein the scheduling information
20 is transferred several times periodically or non-periodically while a radio bearer (RB) for a specific multimedia service is set.

41. The method of claim 36, wherein the scheduling information

42

is transferred through different common traffic channels.

42. The method of claim 36, wherein the scheduling information is time information at which a specific data is to be transmitted.

5

43. The method of claim 36, wherein the scheduling information is transmitted by being added in an MBMS scheduling message.

44. The method of claim 43, wherein different MBMS services
10 use different MBMS scheduling messages.

45. The method of claim 44, wherein different MBMS scheduling messages are transferred to the terminal group through different channels.

15 46. The method of claim 43, wherein the MBMS scheduling message includes a sequence number or an identifier and scheduling information of a specific MBMS data to be broadcast or multicast next.

47. The method of claim 43, wherein the MBMS scheduling
20 message includes information indicating whether the corresponding MBMS data is first transmitted or has been repeatedly transmitted.

48. The method of claim 43, wherein the MBMS scheduling message can be transferred several times periodically while the specific

43

MBMS is provided.

49. The method of claim 43, wherein the MBMS scheduling message can be transferred several times non-periodically while the specific
5 MBMS is provided.

50. The method of claim 49, wherein the MBMS scheduling message indicates a length of an MBMS schedule term and a length between a start point and an end point of the MBMS schedule term.

10

51. The method of claim 36, wherein the scheduling information is generated by a broadcast and multicast control layer of UTRAN.

52. The method of claim 36, wherein the broadcast and multicast
15 control layer transfers scheduling information to a lower layer.

53. The method of claim 36, wherein the scheduling information is transferred to a broadcast and multicast control layer of a specific terminal group.

20

54. The method of claim 53, wherein the broadcast and multicast control layer of the terminal transfers the received scheduling information to a lower layer.


55. The method of claim 36, wherein the terminal group receives multimedia service data for a time indicated by the scheduling information.


5 56. The method of claim 36, wherein the terminal group receives a control signal for other time than the time indicated by the scheduling information.

57. The method of claim 36, wherein the terminal group receives
10 data of other service than the MBMS for a time other than the time indicated by the scheduling information.

58. The method of claim 36, wherein the terminal group stops
receiving of data of services for a time other than the time indicated by the
15 scheduling information.

1/7
FIG.1

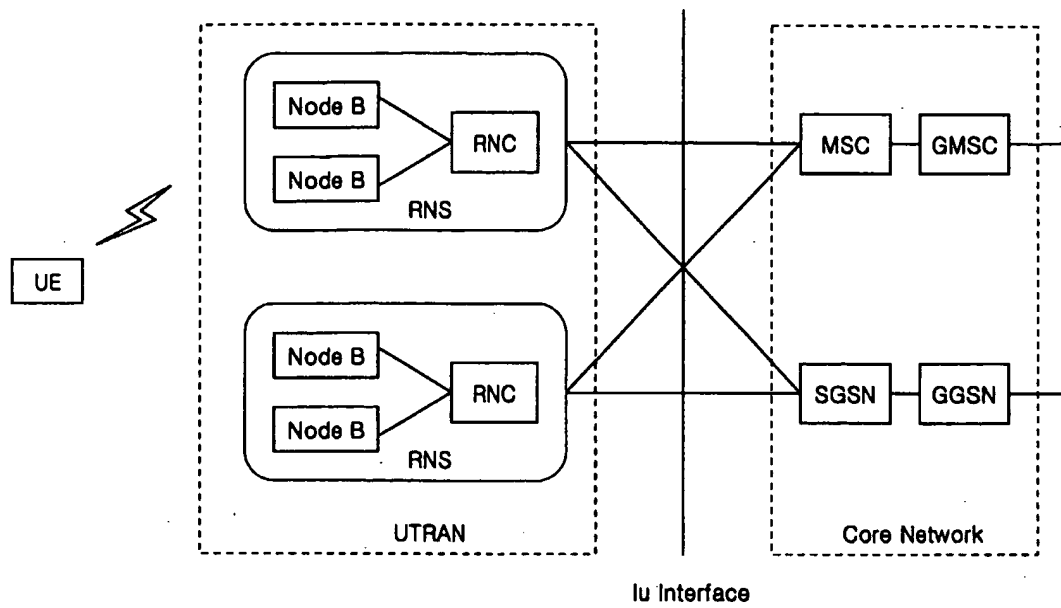

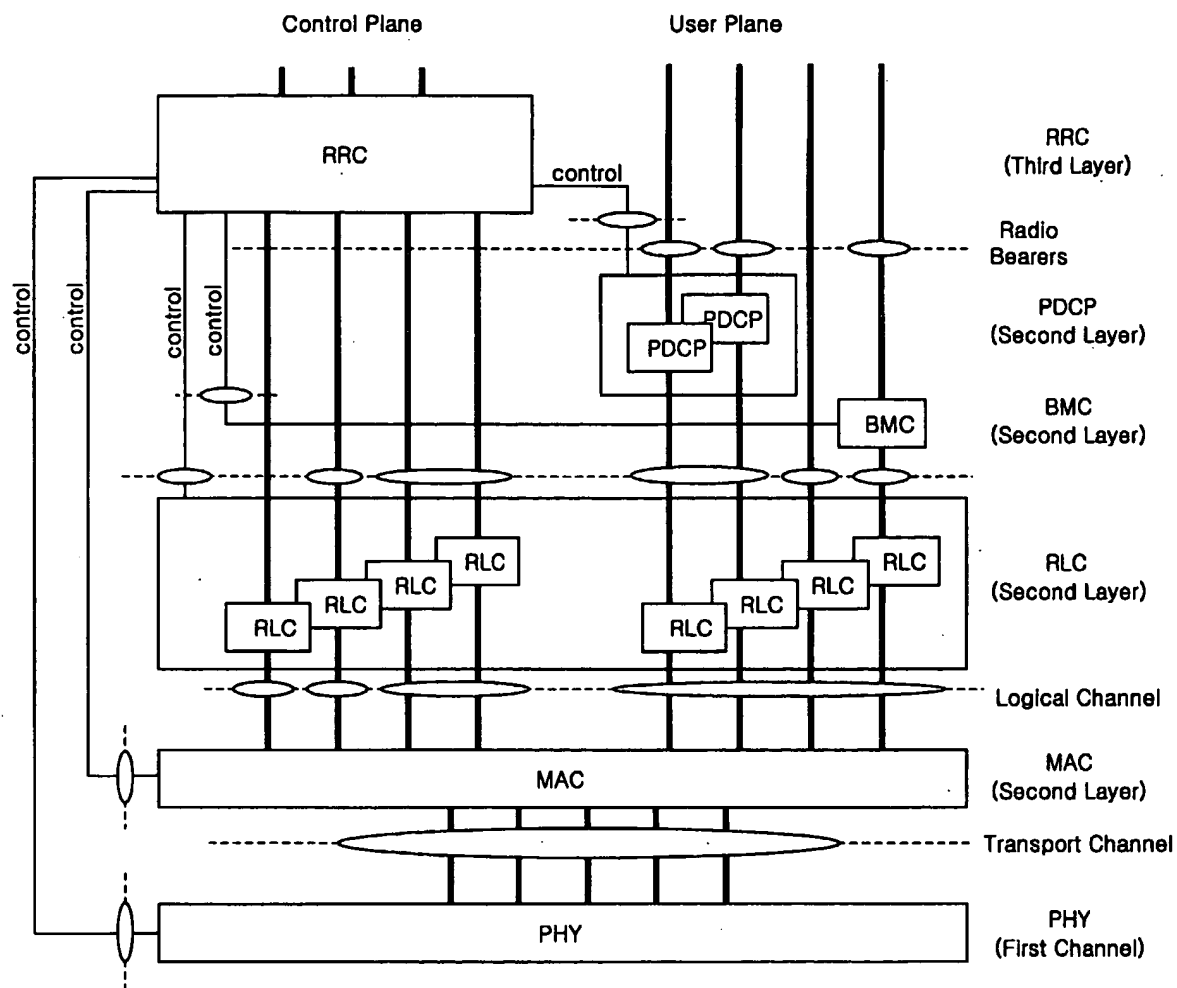2/7
FIG.2

^{3/7}
FIG.3

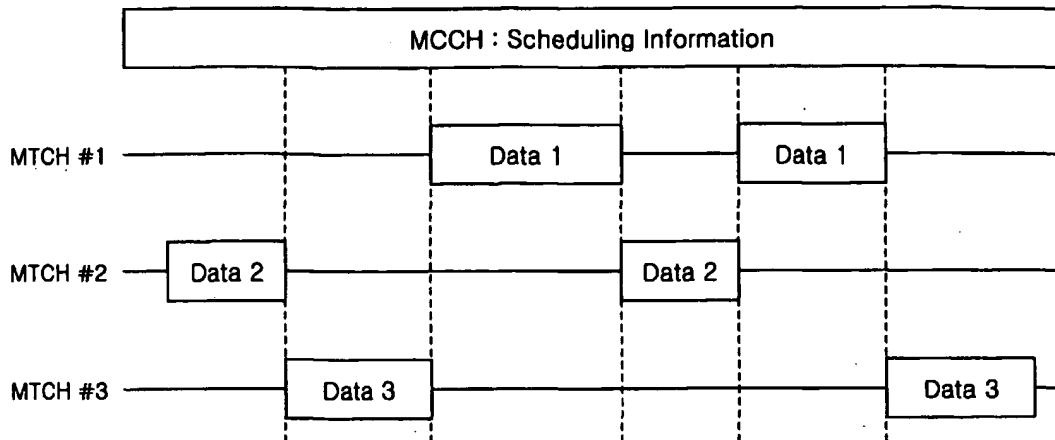
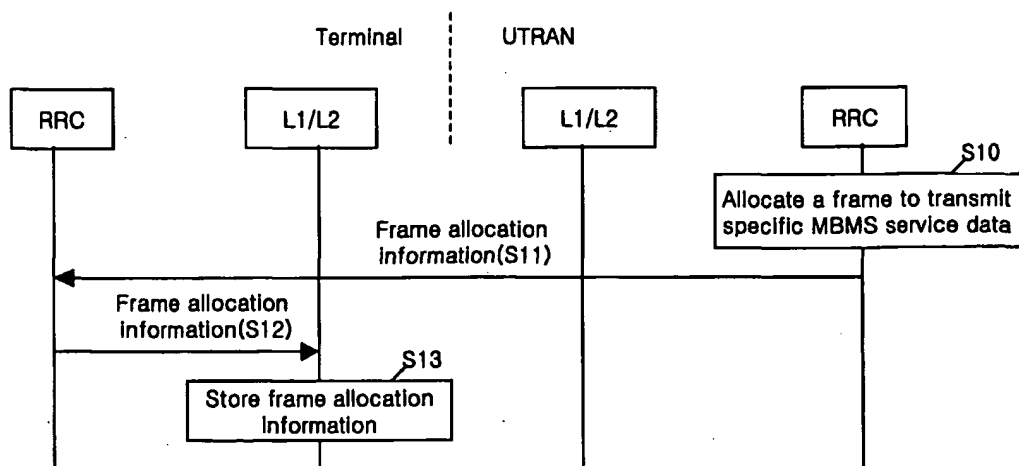
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
		CTCH	CTCH					CTCH	CTCH					CTCH	CTCH		


FIG.4


Message Type
Start point of next CBS schedule period
Length of next CBS schedule period
New message bitmap
Message description


FIG.5

MBMS Service 1	MBMS Service 2	MBMS Service 1	
----------------	----------------	----------------	--

4/7
FIG.6**FIG.7**

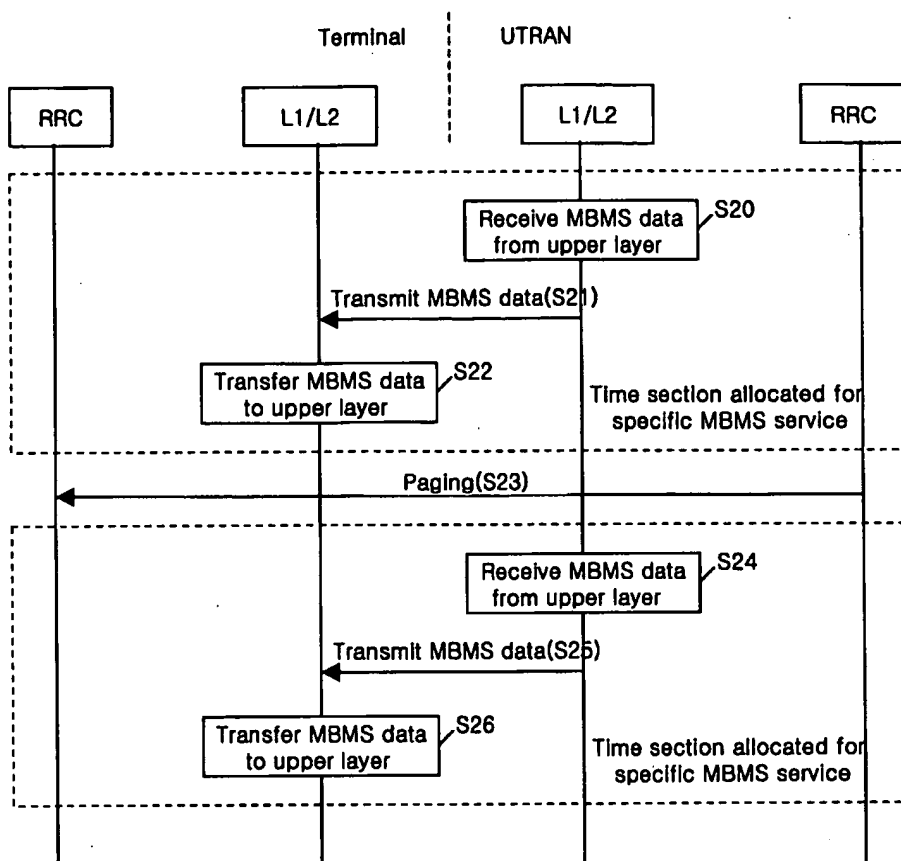5/7
FIG.8

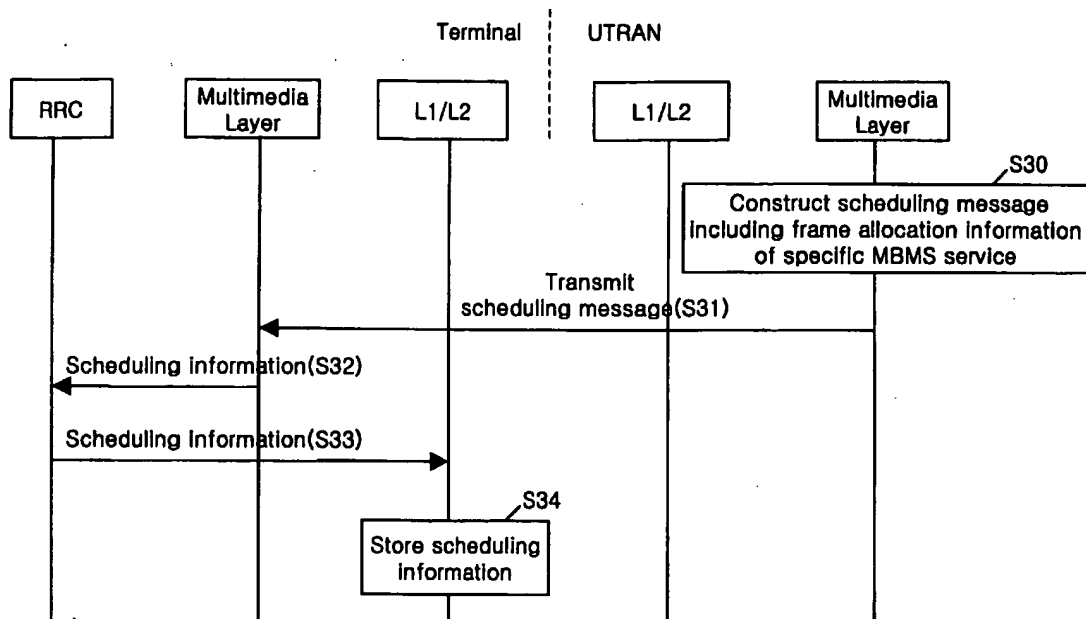6/7
FIG.9

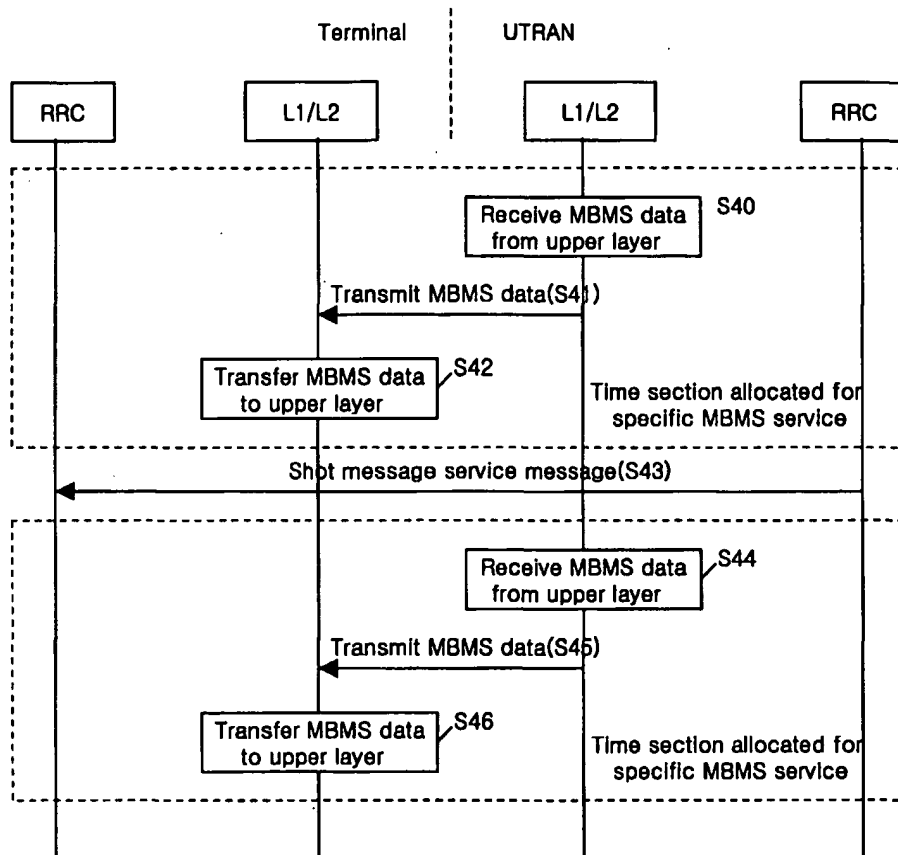7/7
FIG.10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/01632

A. CLASSIFICATION OF SUBJECT MATTER

IPC7 H04B 7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B, H04L, H04Q, G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
KR, JP : as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
KIPONET (multi <or> broad) <and> cast <and> (radio <or> wireless) <and> resource

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 1020020044306 A (LG Electro.) MAY 15, 2002 see abstract and drawings	1-4
A	JP 13308856 A (NTT DOCOMO) NOV 2, 2001 see abstract and drawings	1-4
A	KR 1020000033183 A (Hyundai Electron) JUN 15, 2000 see abstract and drawings	1-4
A	KR 1020010096484 A (KIM YONG HWA) NOV 7, 2001 see abstract and drawings	1-4
A	JP 13218245 A (NTT DOCOMO) AUG 10, 2001 see abstract and drawings	1-4

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 NOVEMBER 2003 (24.11.2003)

Date of mailing of the international search report

24 NOVEMBER 2003 (24.11.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

JEON, Jong Seong

Telephone No. 82-42-481-5948

